REFLECTA**FOAM**

4 IN 1 DESIGN

INSULATION, VAPOUR CONTROL LAYER, ACOUSTIC MEMBRANE, RADIANT BARRIER

REFLECTIVE PROPERTIES

PURE ALUMINIUM OUTER LAYER REFLECTS UP TO 95% OF RADIANT HEAT

AIR TIGHTNESS


PREVENTS AIR LEAKAGE AND IMPROVES U-VALUES

EASY TO INSTALL

NO SPECIALIST TOOLS REQUIRED.



SF 5215 C **E**₂₄

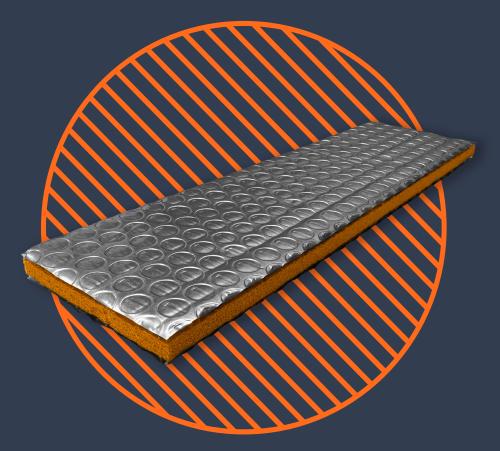







Thermal Insulation For Use In Roofs, Walls & Floors

KEY FEATURES

- SuperFOIL ReflectaFOAM is a semi-rigid product that combines a vapour control layer, acoustic membrane, thermal insulation, and radiant barrier in one.
- Made from up to 99% pure aluminium outer layer, the product is highly reflective and reduces heat loss in winter and blocks solar heat gain in summer.
- The high performance foil insulation utilises low emissivity air gaps to maximise the thermal performance.
- The built-in vapour control layer and thermal foam layer prevent moisture penetration, improve airtightness, and enhance u-values.
- ReflectaFOAM also reduces impact noise levels by up to 24 dB.
- It is perfect for insulating under rafters, ceilings, timber frames, solid walls, suspended floors, and with underfloor heating.
- It requires no specialist tools and causes minimal wastage, making it an ideal DIY solution.










Company Info (UK)

Boulder Developments Ltd, Boulder Business Park, Pioneer Way, Lincoln, LN6 OQR, England.

Company Info (EU)

Boulder Developments Ltd, 1st, 2nd and 3rd Floor, Joop Geesinkweg 901 999, Amsterdam, 1114 AB, Netherlands

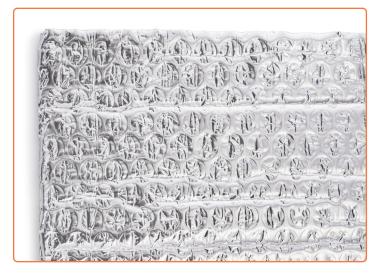

PRODUCT DIMENSIONS	
Thickness	11mm
Length	15m
Width	1.25m
Weight	9kg

THERMAL PERFORMANCE	
Core	0.29 R value
Roof (inc. air spaces)	1.20 R value
Wall (inc. air spaces)	1.62 R value
Floor (inc. air spaces)	1.82 R value
Emittance	0.05

FIRE PERFORMANCE

Reaction to Fire (Euroclass) CLASS F

Sizes / Figures are approximate & Subject to change without notice, tolerance







